



Deli Meat Showcase
Supermarket
refrigerator
equipment



Available colours

RAL9005; GN150A; GL180A; GY070A

MW201T; GL205A; RAL9003; RAL9010



Reefer Box Design

The bottom reefer box design increases the number of stored goods and reduces the time for each replenishment



Lip-up Type

The open style of front glass door could to lift up, easy to clean and take goods



Double-layer Shelf


Standard double-layer shelf, capable of carrying more goods

Model	Size (mm)	Temp range(°C)	Volume(L)	Certification	Voltage / Frequency
GKA-18N	1875*1050*1250	0~5°C	330	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-25N	2500*1050*1250	0~5°C	440	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-29N	2900*1050*1250	0~5°C	510	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-37N	3750*1050*1250	0~5°C	670	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-18NR	1875*1050*1250	0~5°C	330	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-25NR	2500*1050*1250	0~5°C	440	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-29NR	2900*1050*1250	0~5°C	510	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
GKA-37NR	3750*1050*1250	0~5°C	670	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ

Temperature (°C)

0~5°C

Applicable Category



Classe Energetica



Classe energetica riferita ad una specifica configurazione del banco, che può variare sensibilmente per una diversa configurazione.



MAIN PARAMETERS

Feet: ≥ 4

Panel: C-P, 40mm

Defrost: Automatic

Refrigeration Method: Air cooling

Refrigerant: R290

Compressor: Secop/Outdoor Compressor

Thermostat: Elitech/Dixell/Hkreco

Light: LED/6500K 24V

Evaporator: Internal head evaporator

Condenser: Steel Wire Condenser

Door Glass (Thickness): LOW-E Glass

Liner Material: Embossed Aluminum Plate

Casters: With Casters



Packaging: Log Wooden Frame

Climate Type: Class III

Anti-electric shock type: Class I

CUSTOMIZABLE ITEMS

- Optional Plug in/Remote
- The front glass can be optionally fixed glass, left and right sliding doors, or flip glass doors
- Customizable product color, plug and voltage frequency
- Cabinet color: customizable

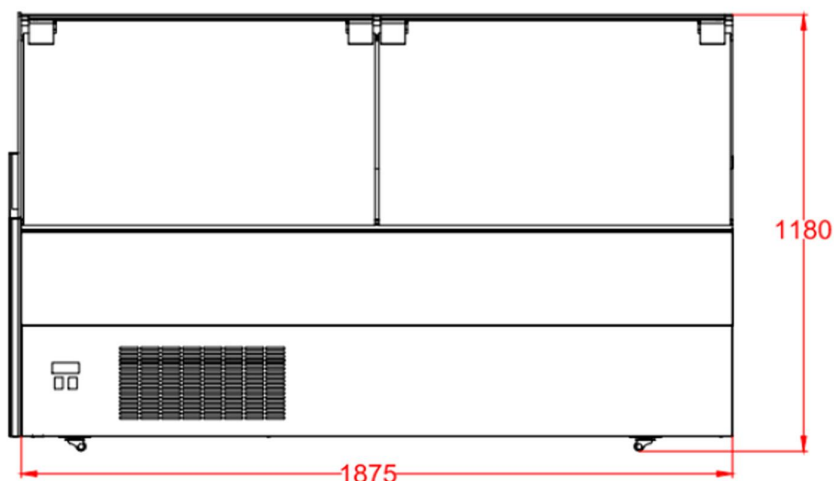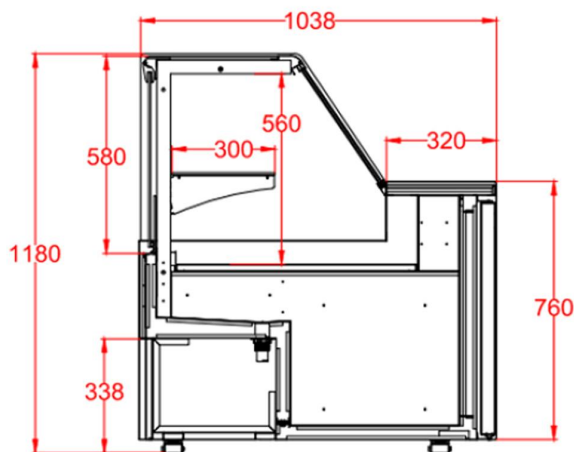

AVAILABLE COLOURS

RAL9005; GN150A; GL180A; GY070A;
MW201T; GL205A; RAL9003; RAL9010

Additional Information

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.

Create Refrigeration

Xingfu Industrial Park, Binzhou City,
Shandong Province, China
Ph: +86 138 5430 6994

Email: create6994@createrefrigeration.com

www.createrefrigeration.com

CUSTOMIZABLE ITEMS

- The cabinet is easy to clean and hygienic. Powdercoated galvanized sheet exterior surface makes the cabinet beautiful and elegant.
- The air speed and air volume in the cabinet are more uniform, and the insulation layer is 40MM, which prevents the loss of cooling capacity, increases the cooling capacity and ensures the comprehensive energy consumption ratio of the product.
- Imported compressors meet the cooling capacity needs of this product. Noise is controlled at 45 decibels. Solved the problem of high noise of the whole machine.
- Brand new LED lighting, no blind spots in the space, and outstanding product display effect.
- The product is suitable for supermarkets, markets, and delicatessens to store cooked food, meat products, dishes and other foods.

