

LC Glass Door Freezer & Chiller-Plug In

Create
REFRIGERATION



Glass Door • Supermarket refrigerator equipment



Available colours

RAL9005; GN150A; GL180A; GY070A

MW201T; GL205A; RAL9003; RAL9010

www.createrefrigeration.com



Applicable Places

Suit for all kinds of supermarket, hypermarket convenience store, mini shop.



Self-Closing Door

Self-closing glass door to keep the inner temperature and save cold power.



Applicable Products


Beverages, water, yoghurt, fruits, vegetables and other food that need refrigeration.

Model	Size (mm)	Temp range(°C)	Volume(L)	Certification	Voltage / Frequency
LC-0.6	680*750*2030	2~8°C	520	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-1.2	1260*750*2030	2~8°C	1050	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-1.8	1880*750*2030	2~8°C	1380	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-2.5	2500*750*2030	2~8°C	1880	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-0.6F	680*750*2030	≤-18~-22°C	520	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-1.2F	1260*750*2030	≤-18~-22°C	1050	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-1.8F	1880*750*2030	≤-18~-22°C	1380	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ
LC-2.5F	2500*750*2030	≤-18~-22°C	1880	CE,CB,ETL,ROHS,UL,IEC	220V/50HZ; 110V/60HZ; 220V/60HZ

Temperature (°C)

2~8°C/≤-18~-22°C

Applicable Category



Classe Energetica



Classe energetica riferita ad una specifica configurazione del banco, che può variare sensibilmente per una diversa configurazione.



MAIN PARAMETERS

Door: 1~4 Door Double glazing

With Low-E coated glass

Material: Coated Steel

Isolation Material: C5H10

Panel: C-P, 70mm

Plug: Customer choice

Color: Customer choice

Internal lighting: LED 6000K

Handle: Grippd

Return pipe: Copper

Compressor: Secop

Refrigerant: R290

Evaporator: Copper tube

Thermostat: Elitech

Wheels: 4 adjustable wheels


Cooling System: Air Cooling

Climate type: N-ST

CUSTOMIZABLE ITEMS

Size & Door Config: Available in 1 to 4 doors (including 3-door LC-1.8T) with optional overhead light boxes.

Power & Refrigerant: Support for frequency conversion, 110V/220V voltage adjustments, and custom eco-friendly refrigerants.

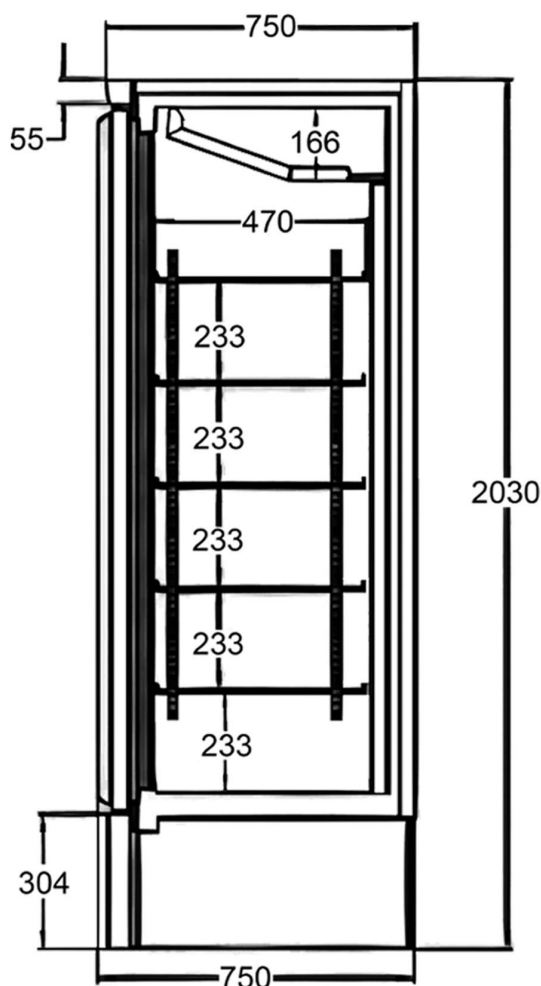

AVAILABLE COLOURS

RAL9005; GN150A; GL180A; GY070A;
MW201T; GL205A; RAL9003; RAL9010

Additional Information

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.

Create Refrigeration

Xingfu Industrial Park, Binzhou City,
Shandong Province, China
Ph: +86 138 5430 6994

Email: create6994@createrefrigeration.com

www.createrefrigeration.com

CUSTOMIZABLE ITEMS

- Big insulated transparent door can prevent condensation and reduce energy consumption.
- Adjustable shelves integrated with price tag and label easy for goods classify.
- Cold air pushed strongly by EBM fan to make sure the quick refrigeration effect and balanced temperature.
- Brand energy-saving compressor: Equip energy-saving compressor, refrigeration speed is fast, the effect is remarkable, fully ensure the lasting efficiency and energy saving of the product.

